



lumini Solucoes em Iluminacao LTDA
www.lumini.com.br
Email: laboratorio@lumini.com.br
Tel: +55 11 3437-5555 Fax: +55 11 3437-5555
Address: Rua Ferreira Viana, 716 - Socorro - São Paulo/SP

lumini

LumCAT:

Luminaire: downled md r cob e fc

LampCAT: modulo led 32W 30K irc 90

Ballast type: led driver 900mA

Report No:

Voltage(V): 127.0000

Test No:

Current(A): 0.2890

Number of Lamps: 1

Power (W): 36.2000

Lamp flux(lm): 3200.0

PF: 0.9900

Length(mm): 130

Width(mm): 130

Phm Type: C

Height(mm): 0

Photometric Results

Lumens(lm): 2498.76, Efficiency(%): 78.09% , Luminous Efficacy(lm/W): 69.03

Central intensity(cd): 26960.780, Maximum intensity(cd): 26960.780

Angle of maximum intensity: $C=0.0$ $\gamma=0.0$


Beam angle of C0 plane : 11.86


Average BeamAngle(IEC 61341): 11.86

Equipment: equipamento lumini
Temperature(°C): 25.5


Date: 18/09/2024
Humidity(%): 55.0%

Operator: 01
Distance(m): 6.90

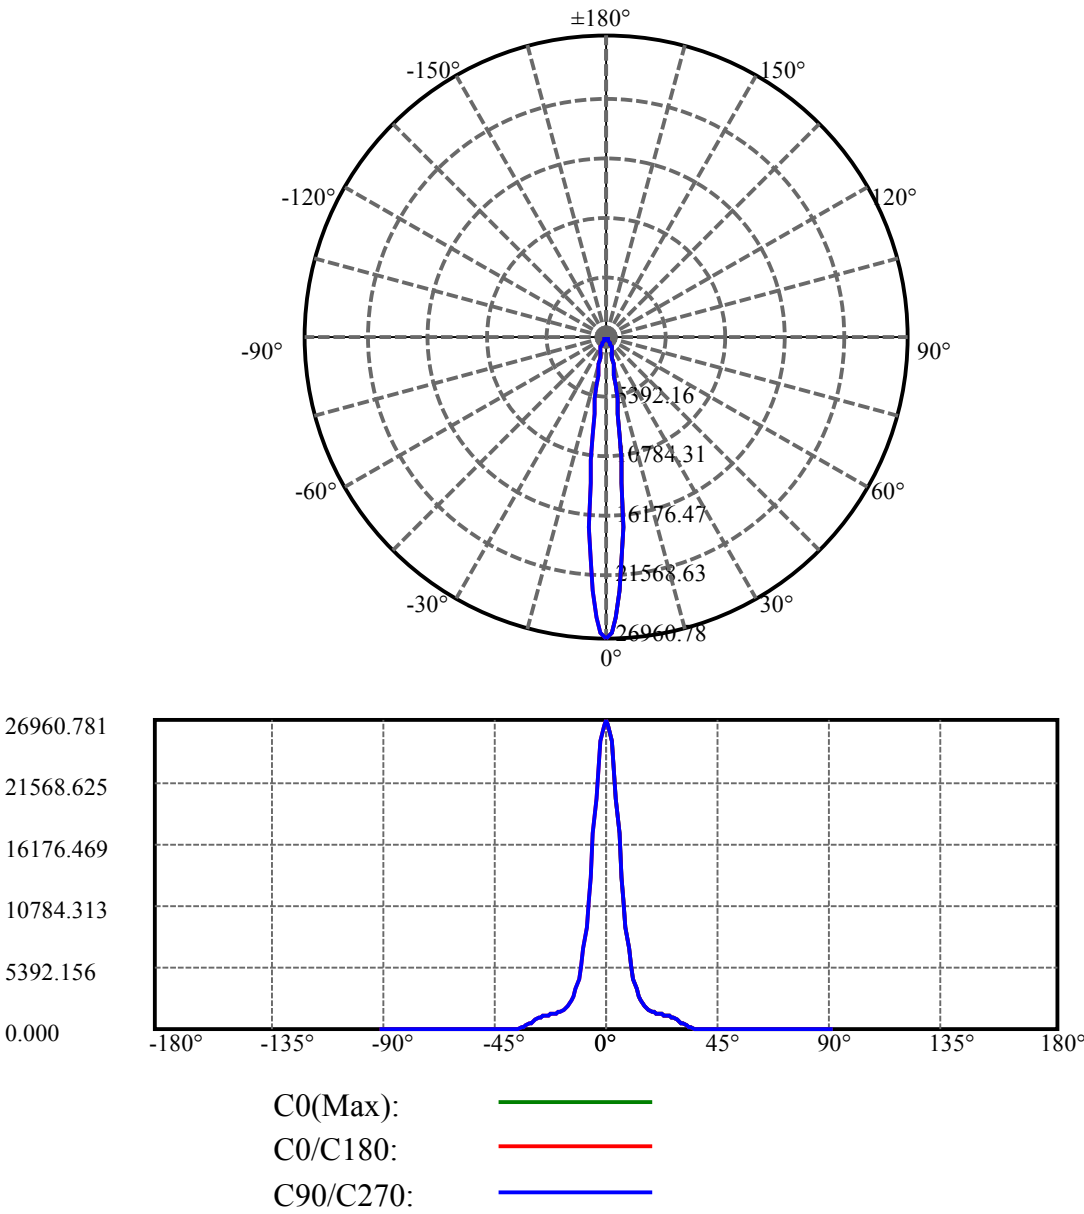

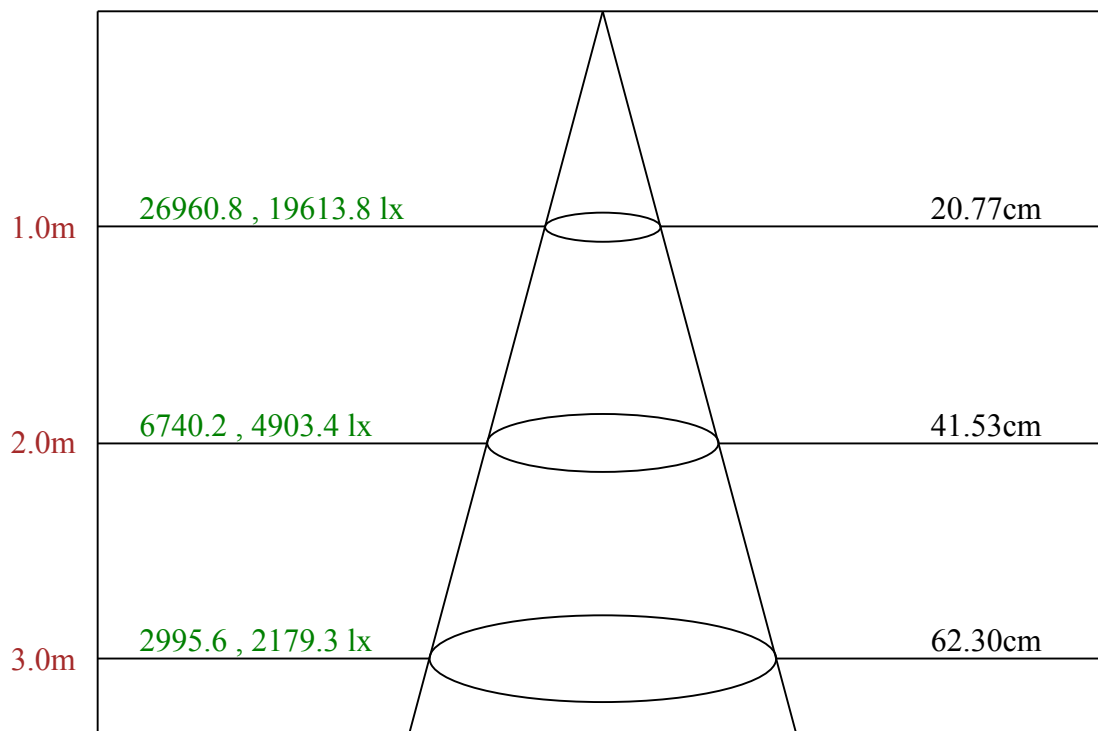

Max , Ave Beam angle of C0 plane 11.86

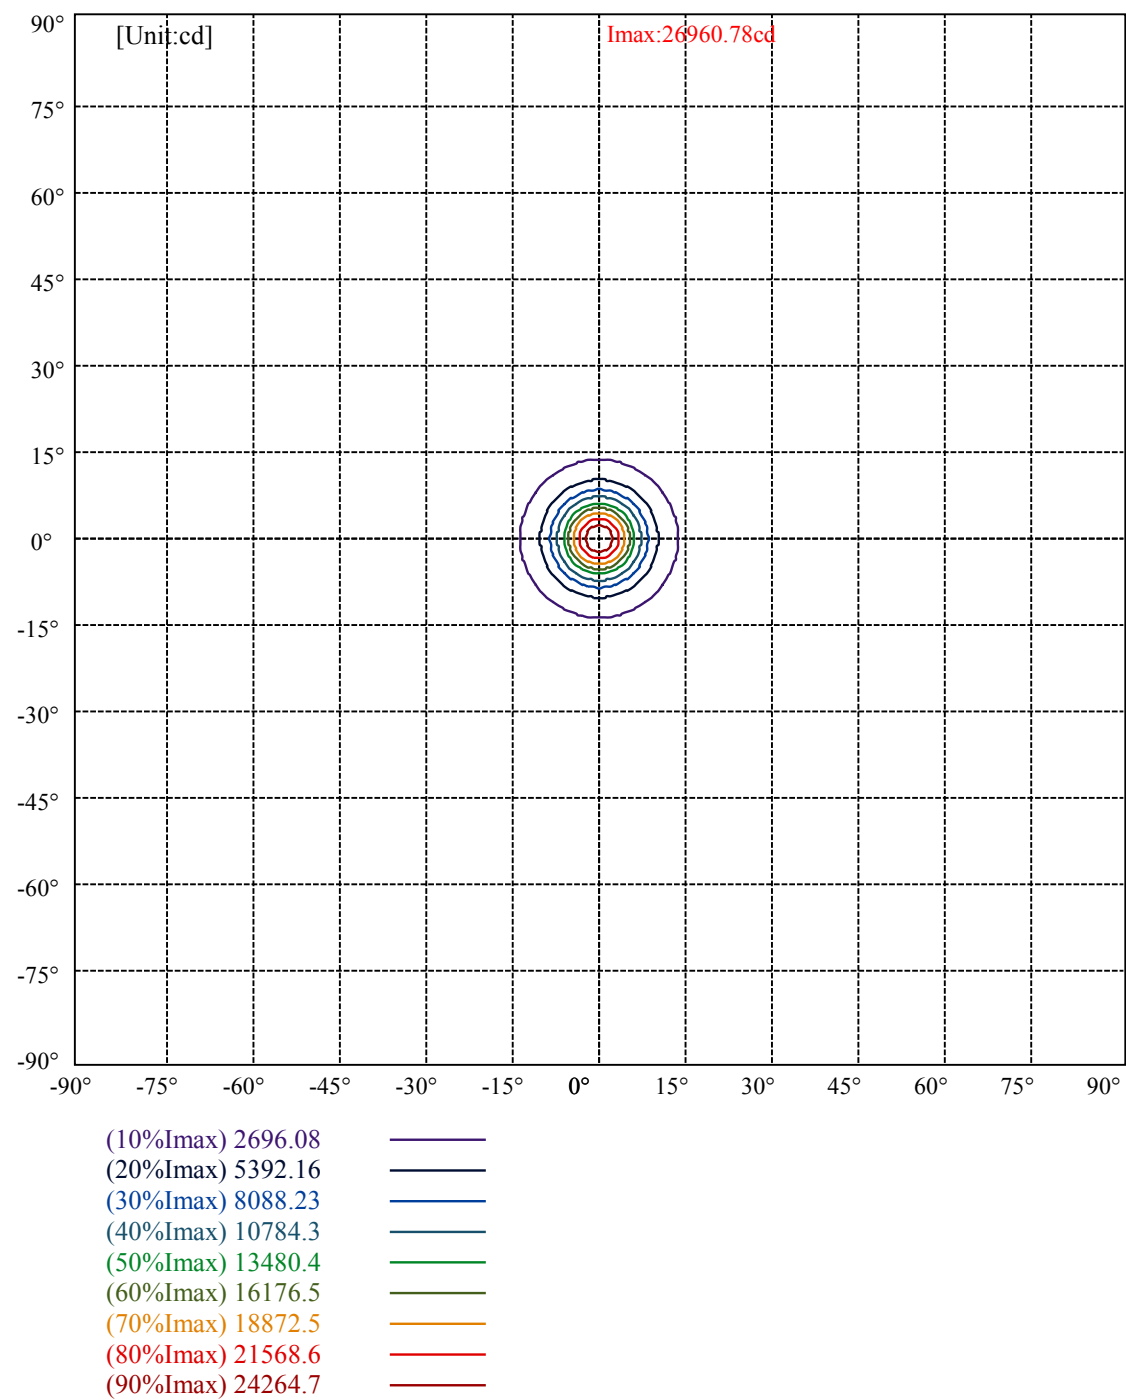

lumini

Luminance Limiting Curve(no luminous side)

Appendix Page: 5 Total:6

Luminance Table

γ	45	50	55	60	65	70	75	80	85
C0	1669	1565	1655	1623	1287	1318	1665	2498	4687
C45	1669	1565	1655	1623	1287	1318	1665	2498	4687
C90	1669	1565	1655	1623	1287	1318	1665	2498	4687


L(Hor)(65)	L(Ver)(65)	L45(65)	L(Hor)(75)	L(Ver)(75)	L45(75)	L(Hor)(85)	L(Ver)(85)	L45(85)
1287	1287	1287	1665	1665	1665	4687	4687	4687

Glare Table

Glare	Quality	Service Values Illuminance(lx)							
1.15	A	2000	1000	500	≤ 300				
1.5	B		2000	1000	500	≤ 300			
1.85	C			2000	1000	500	≤ 300		
2.2	D				2000	1000	500	≤ 300	
2.55	E					2000	1000	500	≤ 300
		a	b	c	d	e	f	g	h

Luminance Limiting Curve

$\gamma(^{\circ})$

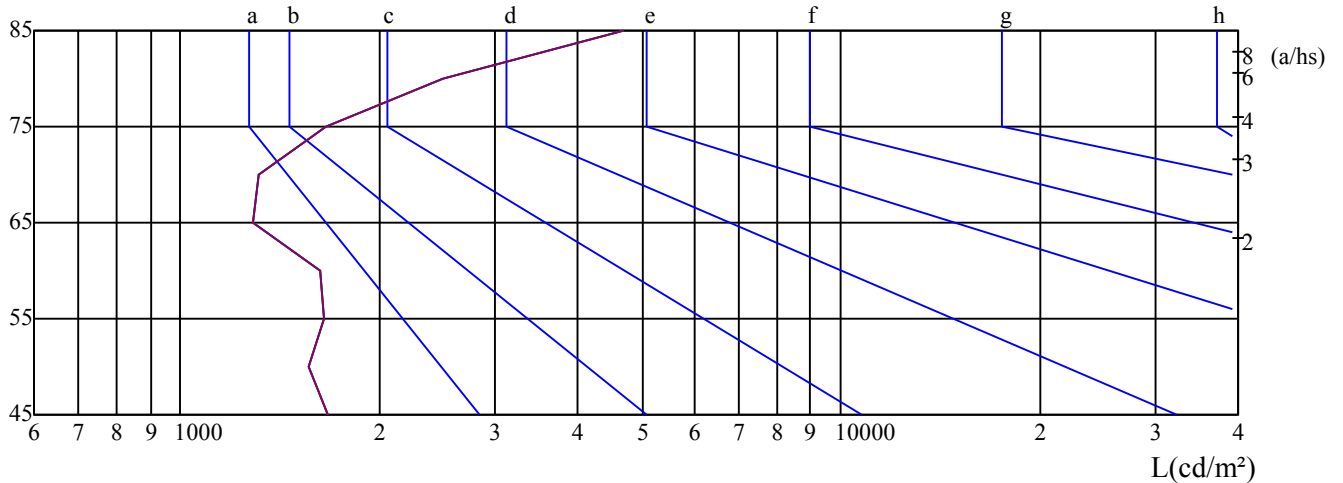

C0 —

C45 —

C90 —

Equipment: equipamento lumini
Temperature($^{\circ}\text{C}$): 25.5

Date: 18/09/2024
Humidity(%): 55.0%

Operator: 01
Distance(m): 6.90

Illumination assessment according UGR											
Rf of Ceiling	70	70	50	50	30	70	70	50	50	30	
Rf of Wall	50	30	50	30	30	50	30	50	30	30	
Rf of Floor	20	20	20	20	20	20	20	20	20	20	
Room dimensions		Viewed crosswise					Viewed endwise				
X	Y										
2H	2H	6.72	7.63	7.09	7.94	8.26	6.72	7.63	7.09	7.94	8.26
	3H	7.14	7.95	7.53	8.29	8.63	7.14	7.95	7.53	8.29	8.63
	4H	7.56	8.31	7.97	8.67	9.04	7.56	8.31	7.97	8.67	9.04
	6H	8.37	9.05	8.79	9.43	9.83	8.37	9.05	8.79	9.43	9.83
	8H	8.93	9.58	9.35	9.96	10.37	8.93	9.58	9.35	9.96	10.37
	12H	9.65	10.27	10.08	10.66	11.08	9.65	10.27	10.08	10.66	11.08
4H	2H	6.72	7.47	7.12	7.82	8.19	6.72	7.47	7.12	7.82	8.19
	3H	7.32	7.95	7.75	8.35	8.77	7.32	7.95	7.75	8.35	8.77
	4H	8.01	8.56	8.45	8.98	9.43	8.01	8.56	8.45	8.98	9.43
	6H	9.10	9.58	9.58	10.03	10.49	9.10	9.58	9.58	10.03	10.49
	8H	9.88	10.32	10.36	10.78	11.25	9.88	10.32	10.36	10.78	11.25
	12H	10.84	11.24	11.33	11.70	12.22	10.84	11.24	11.33	11.70	12.22
8H	4H	8.26	8.71	8.75	9.17	9.64	8.26	8.71	8.75	9.17	9.64
	6H	9.68	10.04	10.18	10.52	11.03	9.68	10.04	10.18	10.52	11.03
	8H	10.72	11.02	11.26	11.55	12.04	10.72	11.02	11.26	11.55	12.04
	12H	11.95	12.17	12.49	12.69	13.21	11.95	12.17	12.49	12.69	13.21
12H	4H	8.36	8.76	8.85	9.22	9.74	8.36	8.76	8.85	9.22	9.74
	6H	9.93	10.23	10.47	10.75	11.25	9.93	10.23	10.47	10.75	11.25
	8H	11.06	11.28	11.60	11.80	12.33	11.06	11.28	11.60	11.80	12.33
Variation with the observer position at spacings:											
S = 1.0H		4.2/-2.3					4.2/-2.3				
S = 1.5H		5.2/-2.0					5.2/-2.0				
S = 2.0H		5.7/-1.4					5.7/-1.4				
Standard tables:		BKBF					BKBF				
Uncorrected UGR		-5.3					-5.3				

依据CIE Publ. 117 计算 UGR, S/H = 0.25