



lumini Solucoes em Iluminacao LTDA
www.lumini.com.br
Email: laboratorio@lumini.com.br
Tel: +55 11 3437-5555 Fax: +55 11 3437-5555
Address: Rua Ferreira Viana, 716 - Socorro - São Paulo/SP

lumini

LumCAT:

Luminaire: focus sm a e sr3 fc 12W 30K irc 90

LampCAT: modulo led 12W 30K irc 90

Ballast type: led driver 350mA

Report No:

Voltage(V): 127.7900

Test No:

Current(A): 0.1250

Number of Lamps: 1

Power (W): 15.2380

Lamp flux(lm): 1585.0

PF: 0.9580

Length(mm): 55

Width(mm): 55

Phm Type: C

Height(mm): 0

Photometric Results

Lumens(lm): 1196.04, Efficiency(%): 75.46% , Luminous Efficacy(lm/W): 78.49

Central intensity(cd): 7462.975, Maximum intensity(cd): 7462.975

Angle of maximum intensity: $C=0.0$ $\gamma=0.0$


Beam angle of C0 plane : 19.39


Average BeamAngle(IEC 61341): 19.39

Equipment: equipamento lumini
Temperature(°C): 25.5


Date: 29/01/2026
Humidity(%): 55.0%

Operator: 01
Distance(m): 6.90

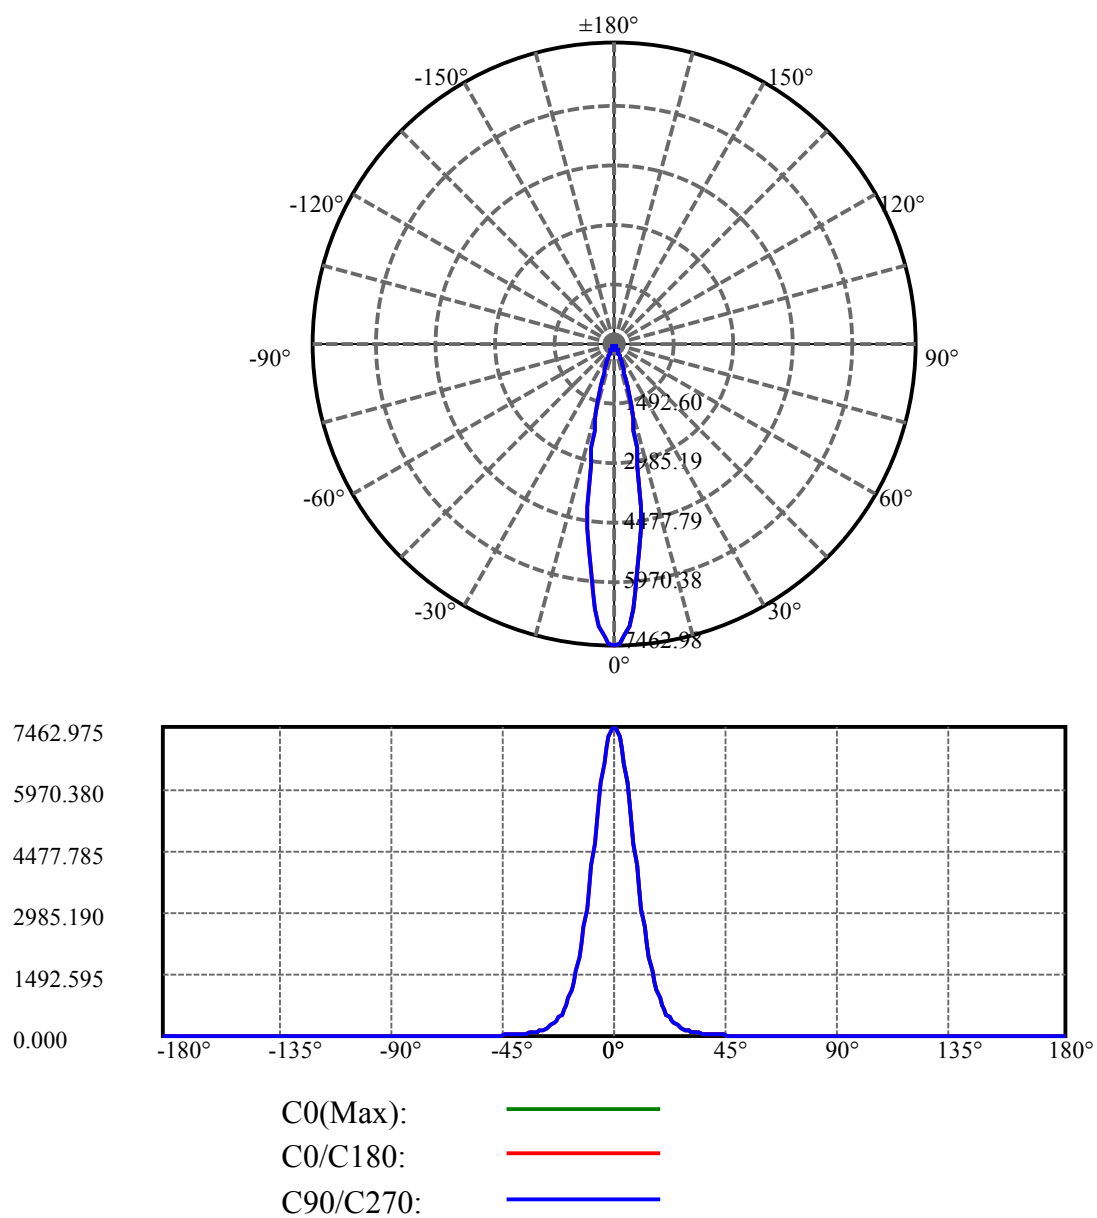

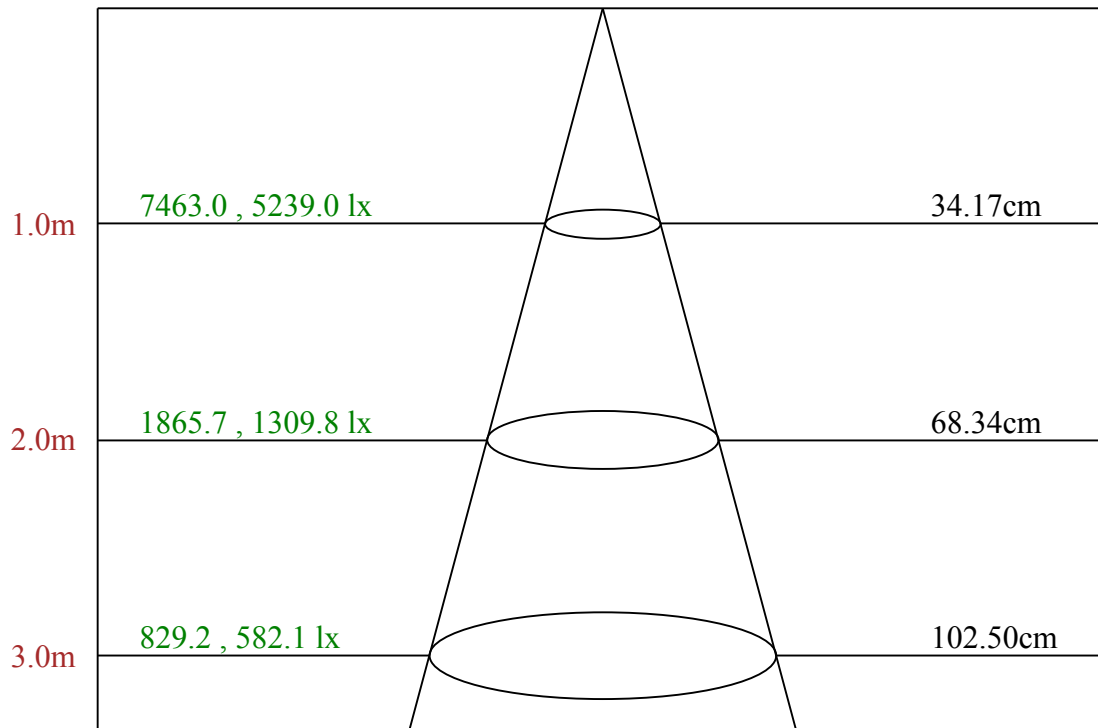

Max , Ave Beam angle of C0 plane 19.39

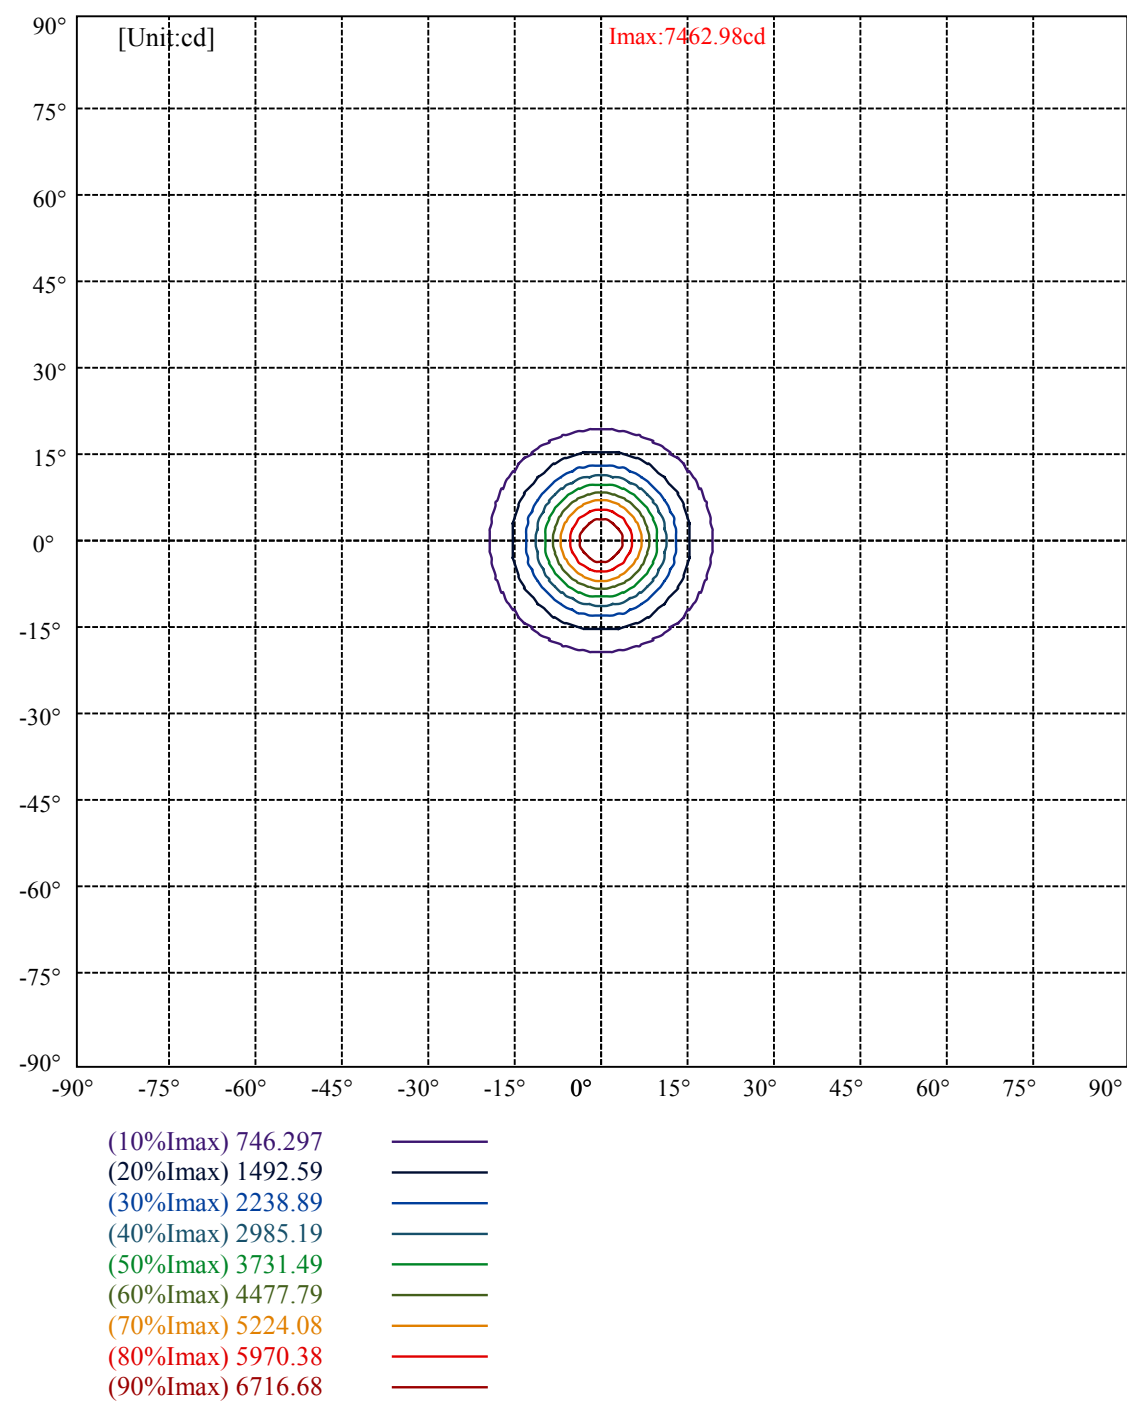

lumini

Luminance Limiting Curve(no luminous side)

Appendix Page: 5 Total:6

Luminance Table

γ	45	50	55	60	65	70	75	80	85
C0	10144	6167	4418	4013	3943	4280	5519	8044	15824
C45	10144	6167	4418	4013	3943	4280	5519	8044	15824
C90	10144	6167	4418	4013	3943	4280	5519	8044	15824


L(Hor)(65)	L(Ver)(65)	L45(65)	L(Hor)(75)	L(Ver)(75)	L45(75)	L(Hor)(85)	L(Ver)(85)	L45(85)
3943	3943	3943	5519	5519	5519	15824	15824	15824

Glare Table

Glare	Quality	Service Values Illuminance(lx)							
1.15	A	2000	1000	500	≤ 300				
1.5	B		2000	1000	500	≤ 300			
1.85	C			2000	1000	500	≤ 300		
2.2	D				2000	1000	500	≤ 300	
2.55	E					2000	1000	500	≤ 300
		a	b	c	d	e	f	g	h

Luminance Limiting Curve

$\gamma(^{\circ})$

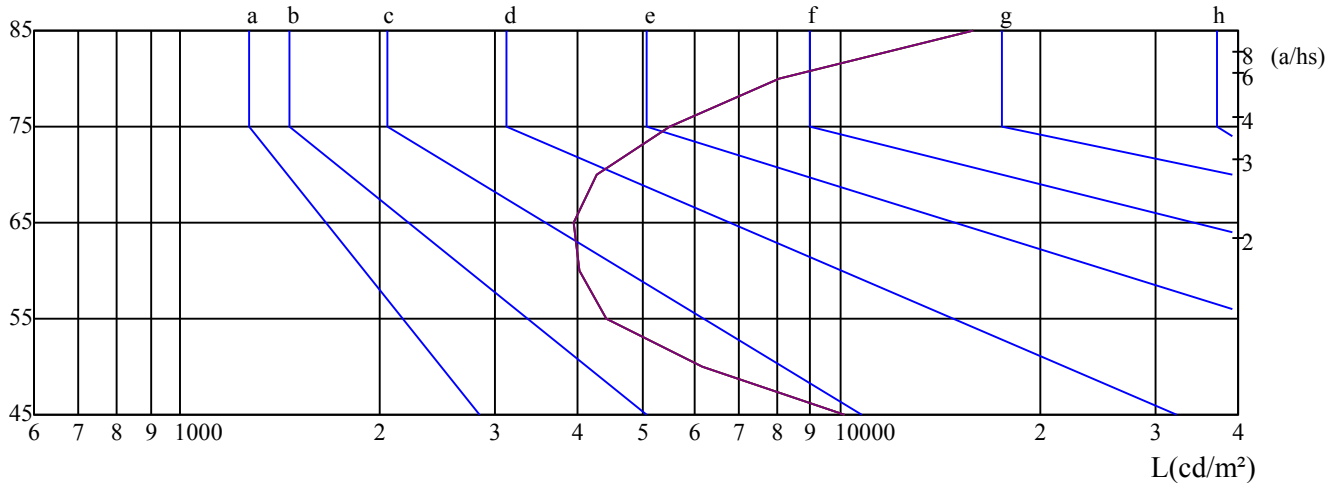

Equipment: equipamento lumini
Temperature($^{\circ}\text{C}$): 25.5

Date: 29/01/2026
Humidity(%): 55.0%

Operator: 01
Distance(m): 6.90

Illumination assessment according UGR											
Rf of Ceiling	70	70	50	50	30	70	70	50	50	30	
Rf of Wall	50	30	50	30	30	50	30	50	30	30	
Rf of Floor	20	20	20	20	20	20	20	20	20	20	
Room dimensions		Viewed crosswise					Viewed endwise				
X	Y										
2H	2H	11.48	12.39	11.89	12.75	13.13	11.00	11.90	11.41	12.27	12.64
	3H	11.91	12.72	12.34	13.10	13.51	11.48	12.28	11.91	12.67	13.07
	4H	12.34	13.09	12.79	13.49	13.92	11.96	12.70	12.40	13.11	13.53
	6H	13.12	13.80	13.59	14.23	14.69	12.80	13.48	13.26	13.90	14.36
	8H	13.68	14.33	14.15	14.77	15.23	13.38	14.03	13.84	14.46	14.93
	12H	14.42	15.04	14.90	15.48	15.96	14.16	14.78	14.63	15.22	15.69
4H	2H	11.43	12.17	11.87	12.58	13.00	10.98	11.73	11.43	12.13	12.56
	3H	12.06	12.69	12.53	13.13	13.60	11.68	12.31	12.15	12.75	13.23
	4H	12.76	13.30	13.24	13.77	14.28	12.45	12.99	12.93	13.46	13.96
	6H	13.83	14.30	14.34	14.80	15.31	13.57	14.05	14.09	14.54	15.05
	8H	14.61	15.05	15.14	15.55	16.08	14.37	14.81	14.90	15.31	15.84
	12H	15.60	16.01	16.13	16.50	17.08	15.40	15.80	15.93	16.30	16.88
8H	4H	13.01	13.45	13.53	13.95	14.48	12.73	13.17	13.26	13.68	14.21
	6H	14.38	14.75	14.93	15.27	15.83	14.17	14.53	14.72	15.06	15.62
	8H	15.44	15.74	16.02	16.31	16.86	15.25	15.55	15.82	16.11	16.66
	12H	16.71	16.94	17.29	17.49	18.07	16.55	16.78	17.13	17.34	17.91
12H	4H	13.09	13.50	13.62	13.99	14.57	12.83	13.24	13.36	13.73	14.31
	6H	14.63	14.93	15.21	15.50	16.05	14.44	14.74	15.01	15.30	15.86
	8H	15.77	16.00	16.35	16.56	17.14	15.60	15.83	16.18	16.38	16.96
Variation with the observer position at spacings:											
S = 1.0H		2.3/-2.0					2.3/-2.0				
S = 1.5H		3.0/-1.6					3.0/-1.6				
S = 2.0H		3.4/-1.5					3.4/-1.5				
Standard tables:		BKBF					BKBF				
Uncorrected UGR		-0.8					-0.8				

依据CIE Publ. 117 计算 UGR, S/H = 0.25