



lumini Solucoes em Iluminacao LTDA
www.lumini.com.br
Email: laboratorio@lumini.com.br
Tel: +55 11 3437-5555 Fax: +55 11 3437-5555
Address: Rua Ferreira Viana, 716 - Socorro - São Paulo/SP

lumini

LumCAT:

Luminaire: darklight 34 c serie 2 fc

LampCAT: modulo led 12W 30K irc 90

Ballast type: led driver 700mA

Report No:

Voltage(V): 127.0300

Test No:

Current(A): 0.1140

Number of Lamps: 1

Power (W): 14.3180

Lamp flux(lm): 1460.0

PF: 0.9870

Length(mm): 320

Width(mm): 25

Phm Type: C

Height(mm): 0

Photometric Results

Lumens(lm): 1256.10, Efficiency(%): 86.03% , Luminous Efficacy(lm/W): 87.73

Central intensity(cd): 6847.651, Maximum intensity(cd): 6847.651

Angle of maximum intensity: $C=0.0$ $\gamma=0.0$


Beam angle of C0 plane : 19.93


Average BeamAngle(IEC 61341): 19.93

Equipment: equipamento lumini
Temperature(°C): 27.2


Date: 17/02/2025
Humidity(%): 65.0%

Operator: 01
Distance(m): 6.90

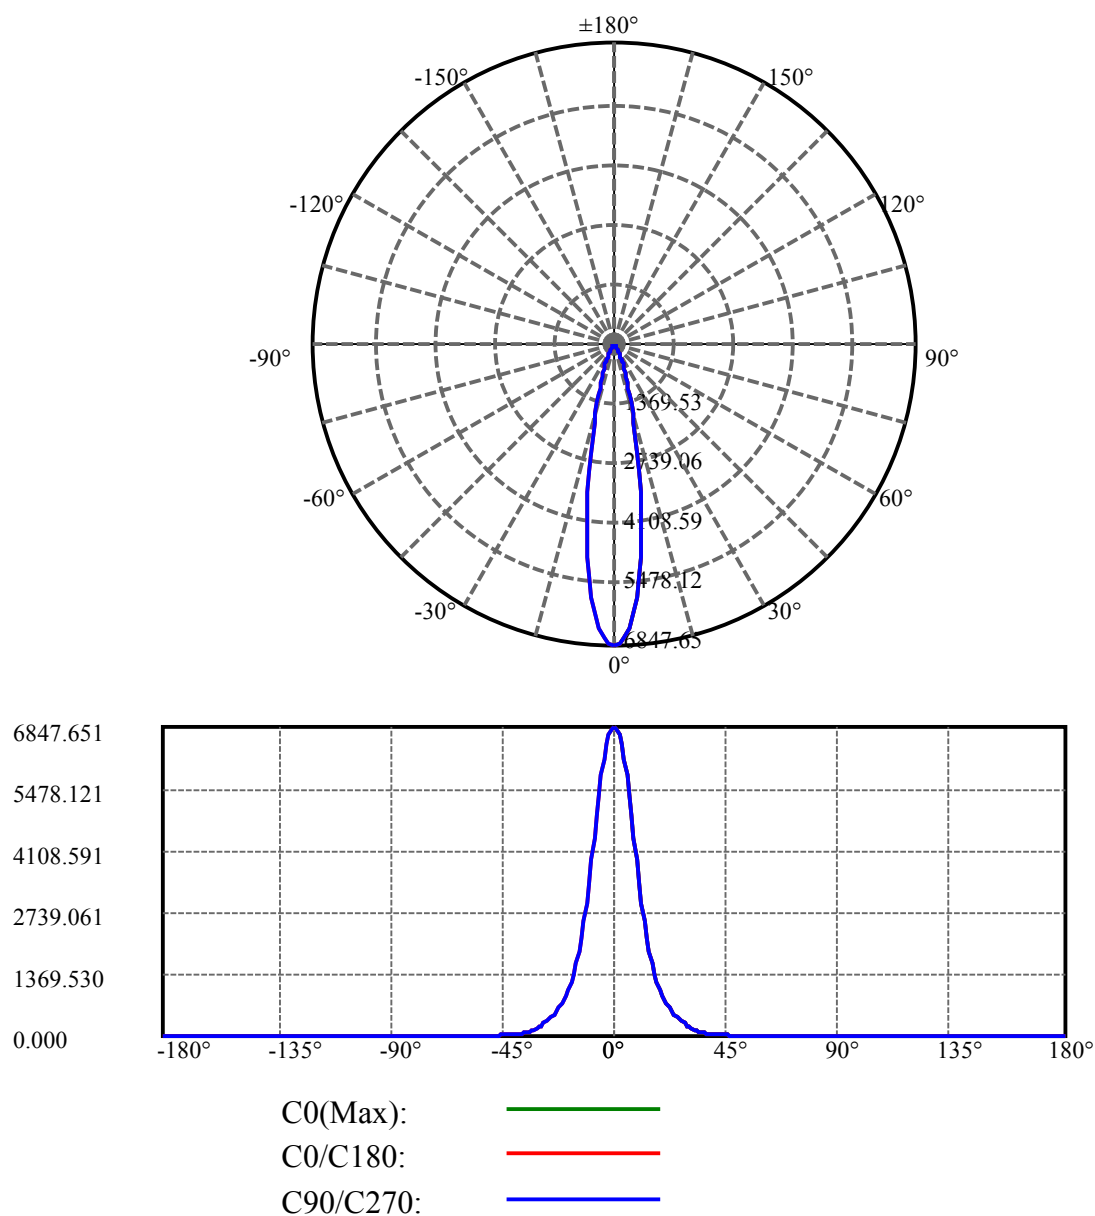

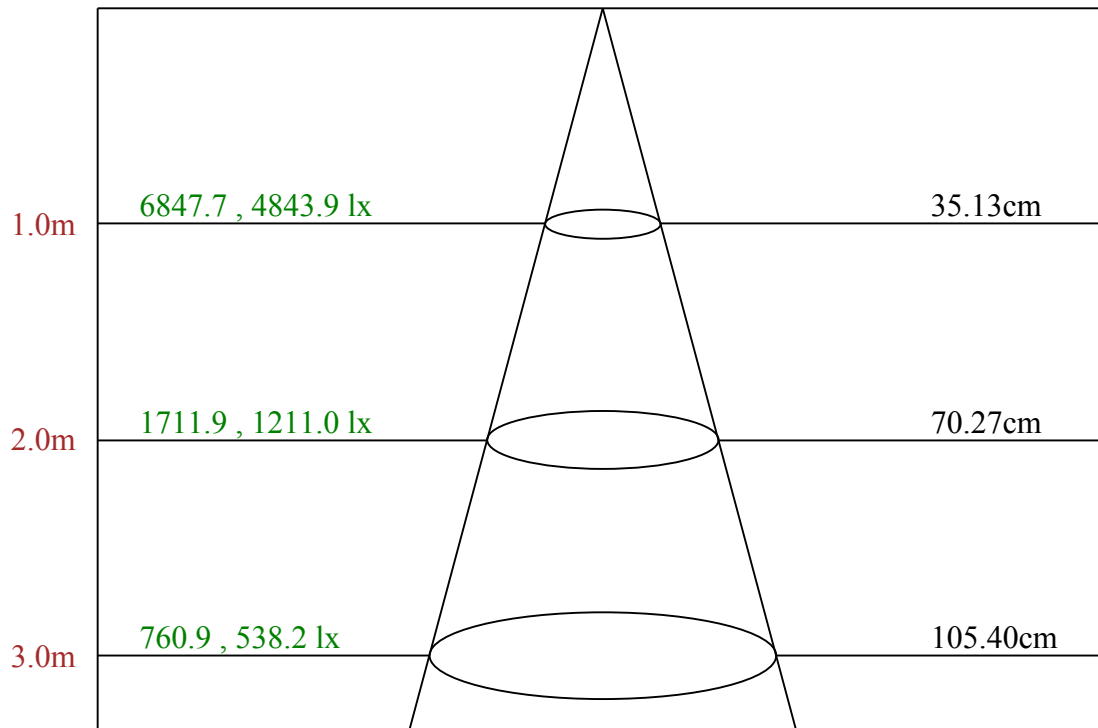

Max , Ave Beam angle of C0 plane 19.93

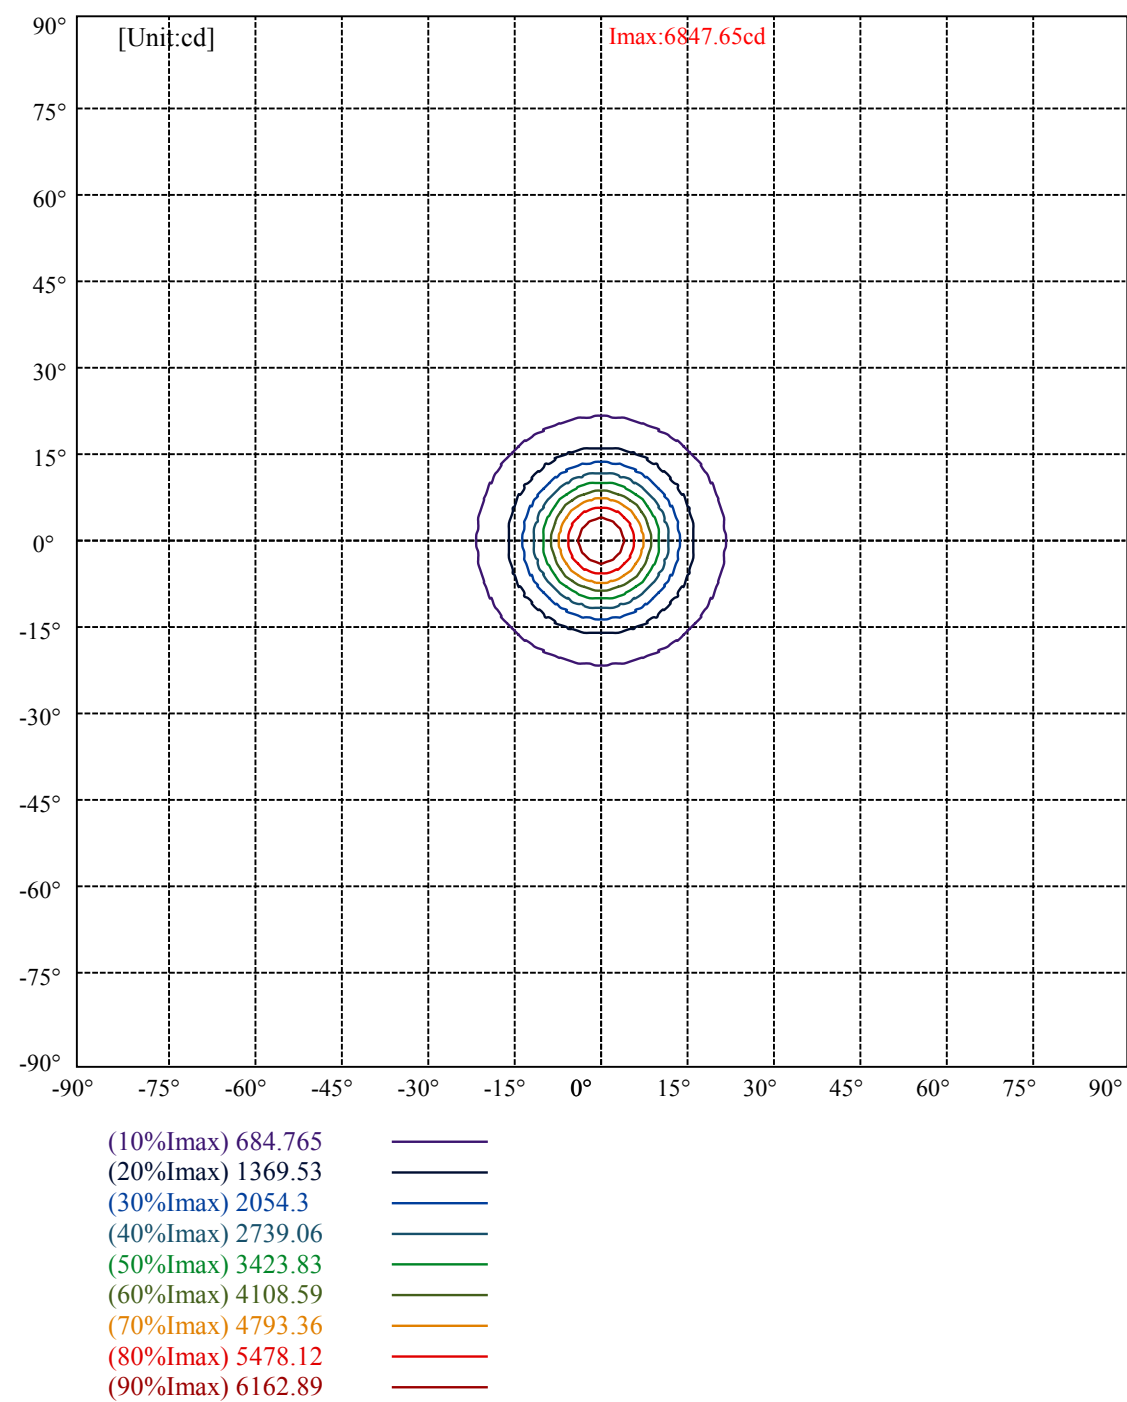

lumini

Luminance Limiting Curve(no luminous side)

Appendix Page: 5 Total:5

Luminance Table

γ	45	50	55	60	65	70	75	80	85
C0	4014	2632	1772	1230	1118	1301	1713	2553	5079
C45	4014	2632	1772	1230	1118	1301	1713	2553	5079
C90	4014	2632	1772	1230	1118	1301	1713	2553	5079


L(Hor)(65)	L(Ver)(65)	L45(65)	L(Hor)(75)	L(Ver)(75)	L45(75)	L(Hor)(85)	L(Ver)(85)	L45(85)
1118	1118	1118	1713	1713	1713	5079	5079	5079

Glare Table

Glare	Quality	Service Values Illuminance(lx)							
1.15	A	2000	1000	500	≤ 300				
1.5	B		2000	1000	500	≤ 300			
1.85	C			2000	1000	500	≤ 300		
2.2	D				2000	1000	500	≤ 300	
2.55	E					2000	1000	500	≤ 300
		a	b	c	d	e	f	g	h

Luminance Limiting Curve

$\gamma(^{\circ})$

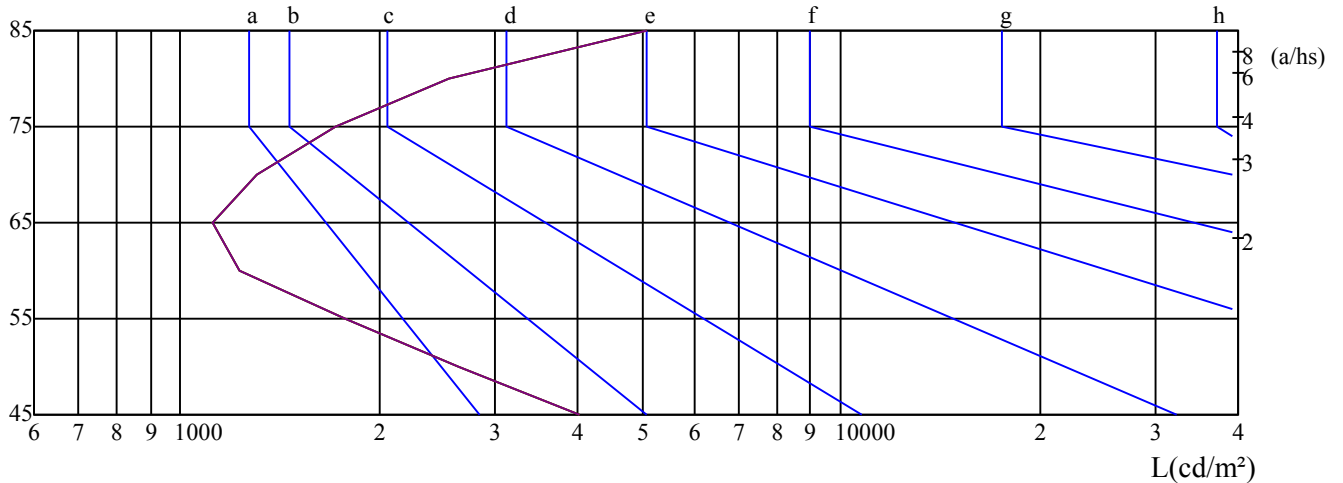

C0 ———

C45 ———

C90 ———

Equipment: equipamento lumini
Temperature($^{\circ}$ C): 27.2

Date: 17/02/2025
Humidity(%): 65.0%

Operator: 01
Distance(m): 6.90