



lumini Solucoes em Iluminacao LTDA
www.lumini.com.br
Email: laboratorio@lumini.com.br
Tel: +55 11 3437-5555 Fax: +55 11 3437-5555
Address: Rua Ferreira Viana, 716 - Socorro - São Paulo/SP

lumini

LumCAT:

Luminaire: darklight 8 c serie 2 fa

LampCAT: modulo led 3W 30K irc 90

Ballast type: led driver 700mA

Report No:

Voltage(V): 127.0000

Test No:

Current(A): 0.0330

Number of Lamps: 1

Power (W): 4.1000

Lamp flux(lm): 395.0

PF: 0.9700

Length(mm): 80

Width(mm): 25

Phm Type: C

Height(mm): 0

Photometric Results

Lumens(lm): 281.82, Efficiency(%): 71.35% , Luminous Efficacy(lm/W): 68.74

Central intensity(cd): 484.575, Maximum intensity(cd): 484.575

Angle of maximum intensity: $C=0.0$ $\gamma=0.0$


Beam angle of C0 plane : 39.79


Average BeamAngle(IEC 61341): 39.79

Equipment: equipamento lumini
Temperature(°C): 25.5

Date: 7/24/2024
Humidity(%): 55.0%


Operator: 01
Distance(m): 6.90

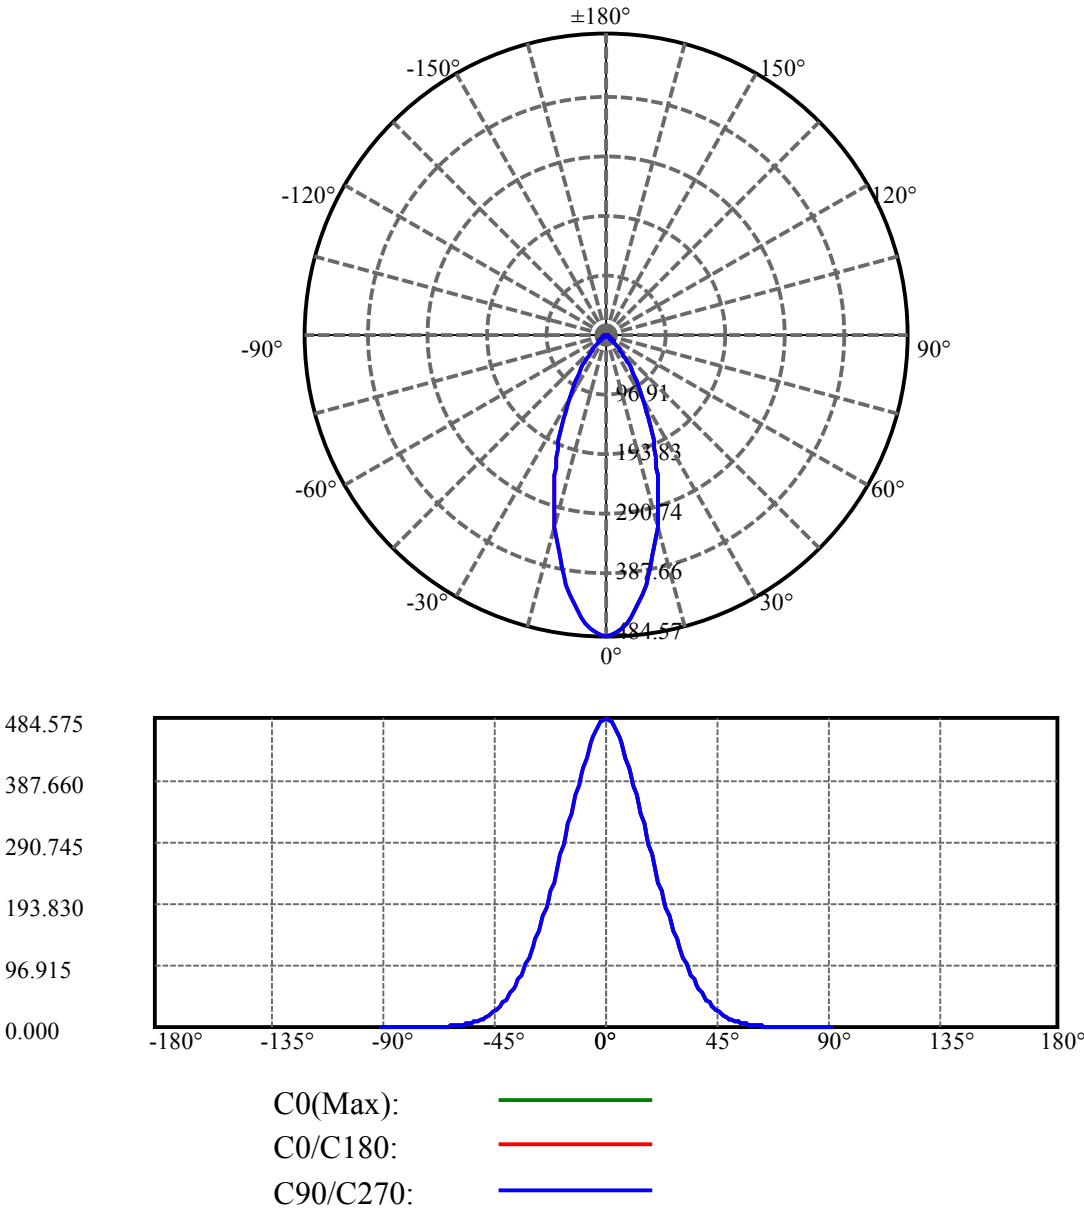

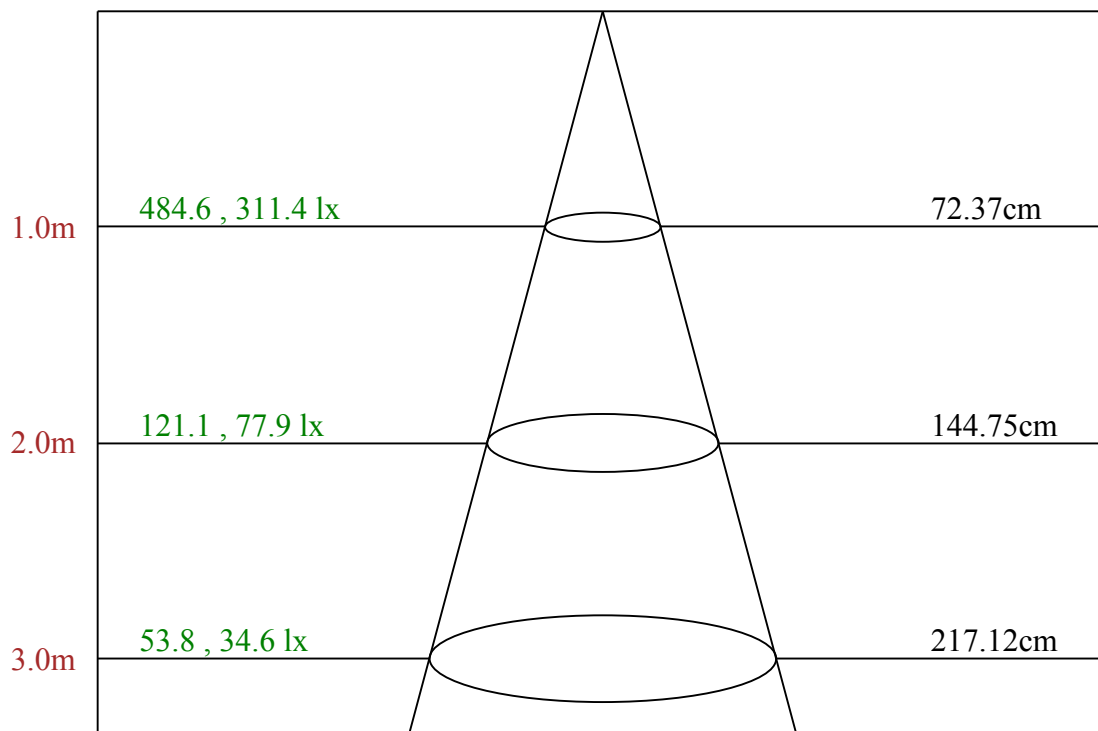

Max , Ave

Beam angle of C0 plane 39.79

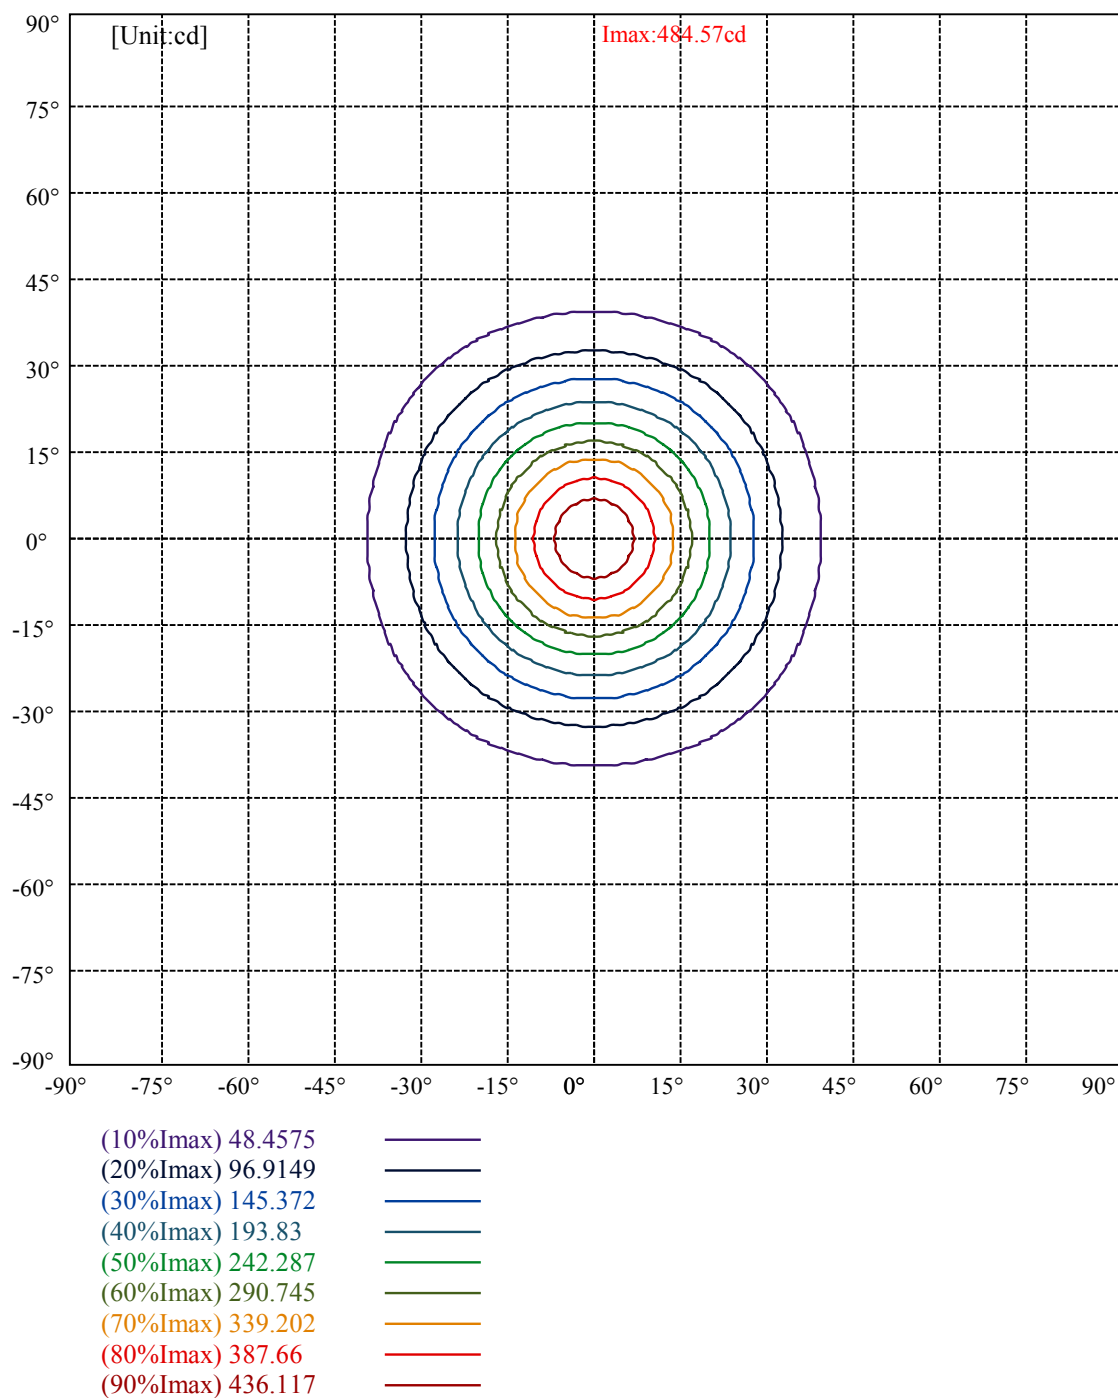

Luminance Table


γ	45	50	55	60	65	70	75	80	85
C0	16193	8962	4980	2523	1296	1044	1288	1919	3824
C45	16193	8962	4980	2523	1296	1044	1288	1919	3824
C90	16193	8962	4980	2523	1296	1044	1288	1919	3824

L(Hor)(65)	L(Ver)(65)	L45(65)	L(Hor)(75)	L(Ver)(75)	L45(75)	L(Hor)(85)	L(Ver)(85)	L45(85)
1296	1296	1296	1288	1288	1288	3824	3824	3824

Glare Table

Glare	Quality	Service Values Illuminance(lx)							
1.15	A	2000	1000	500	≤ 300				
1.5	B		2000	1000	500	≤ 300			
1.85	C			2000	1000	500	≤ 300		
2.2	D				2000	1000	500	≤ 300	
2.55	E					2000	1000	500	≤ 300
		a	b	c	d	e	f	g	h

Luminance Limiting Curve

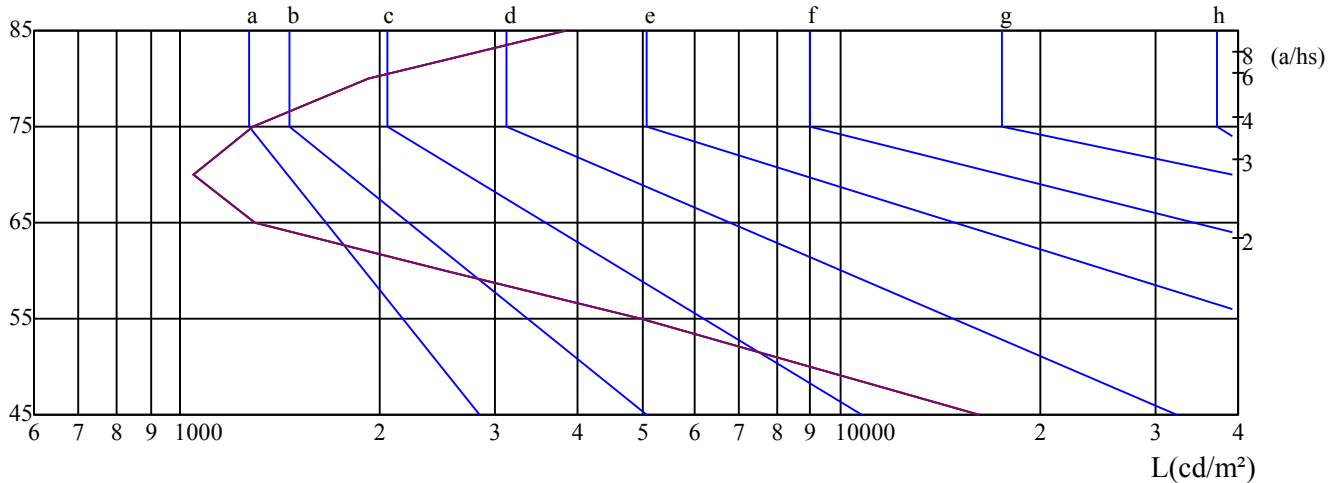 $\gamma(^{\circ})$ 

C0 ———

C45 ———

C90 ———