



lumini Solucoes em Iluminacao LTDA
www.lumini.com.br
Email: laboratorio@lumini.com.br
Tel: +55 11 3437-5555 Fax: +55 11 3437-5555
Address: Rua Ferreira Viana, 716 - Socorro - São Paulo/SP

lumini

LumCAT:

Luminaire: mini frame flex xsm a e fm

LampCAT: modulo led 2W 30K irc 90

Ballast type: led driver 700mA

Report No:

Voltage(V): 127.9500

Test No:

Current(A): 0.0520

Number of Lamps: 1

Power (W): 2.9350

Lamp flux(lm): 235.0

PF: 0.4380

Length(mm): 40

Width(mm): 40

Phm Type: C

Height(mm): 0

Photometric Results

Lumens(lm): 183.93, Efficiency(%): 78.27% , Luminous Efficacy(lm/W): 62.67

Central intensity(cd): 829.640, Maximum intensity(cd): 829.640

Angle of maximum intensity: C=0.0 γ =0.0


Beam angle of C0 plane : 22.65


Average BeamAngle(IEC 61341): 22.65

Equipment: equipamento lumini
Temperature(°C): 25.0

Date: 30/05/2025
Humidity(%): 58.0%


Operator: 01
Distance(m): 6.90

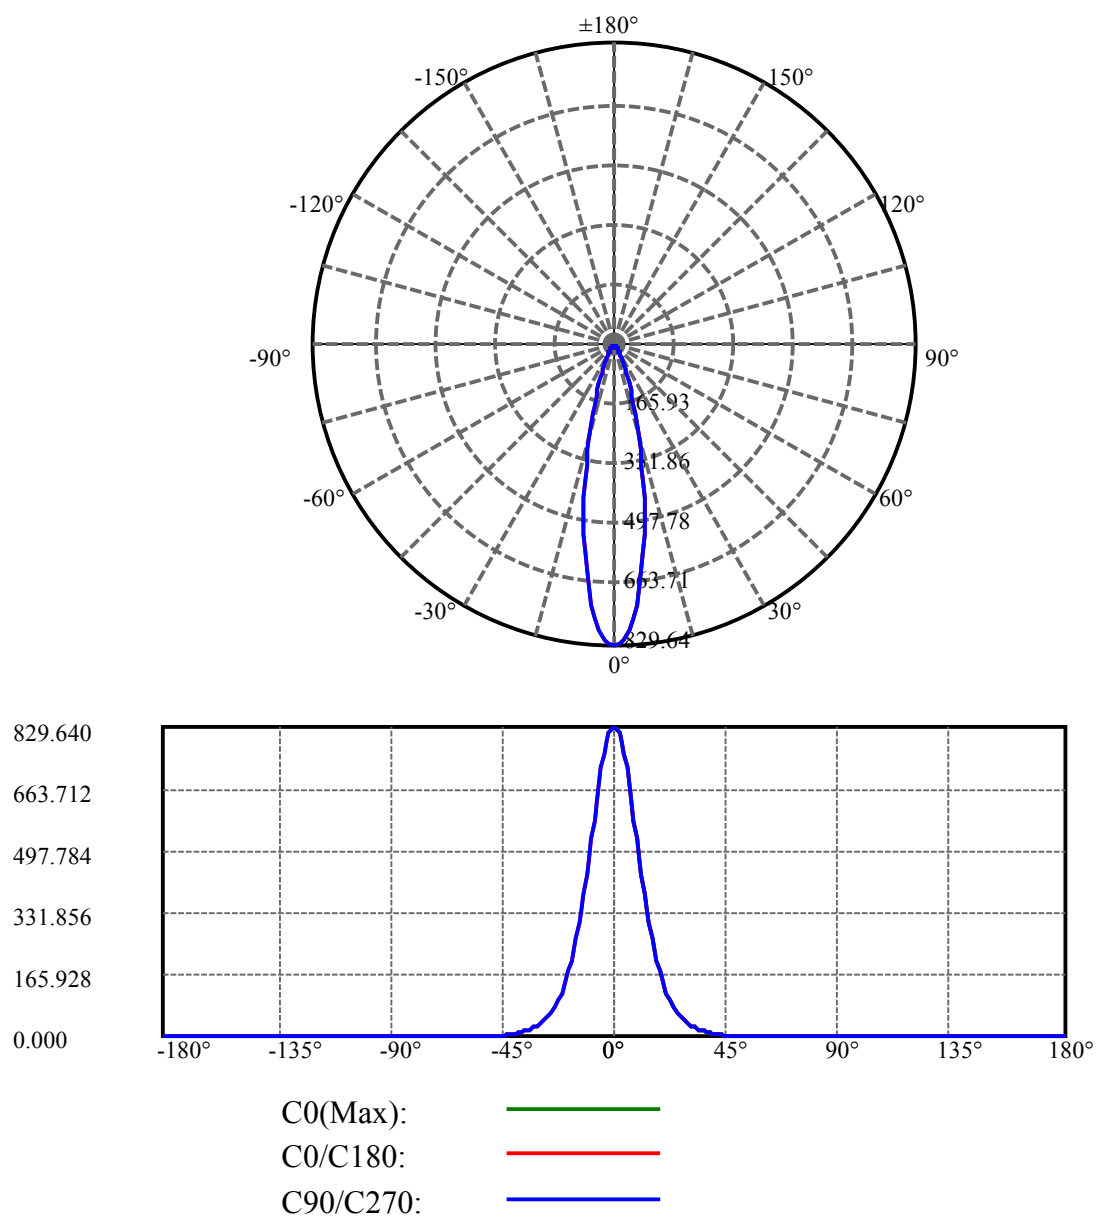

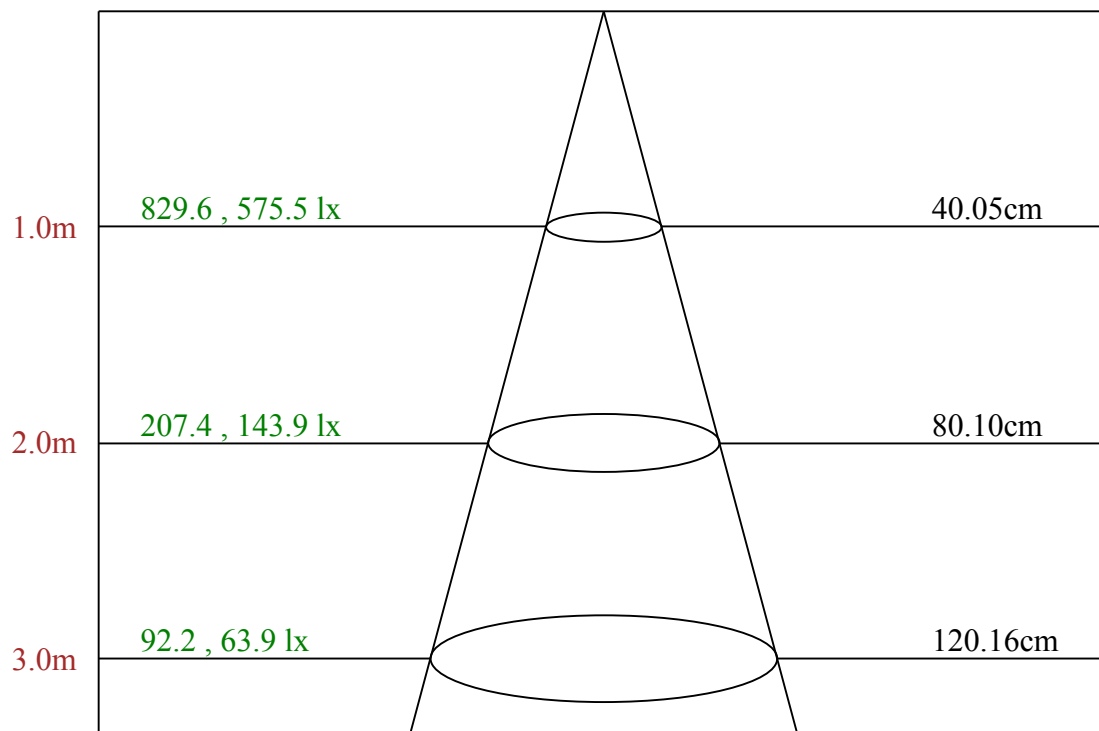

Max , Ave

Beam angle of C0 plane 22.65

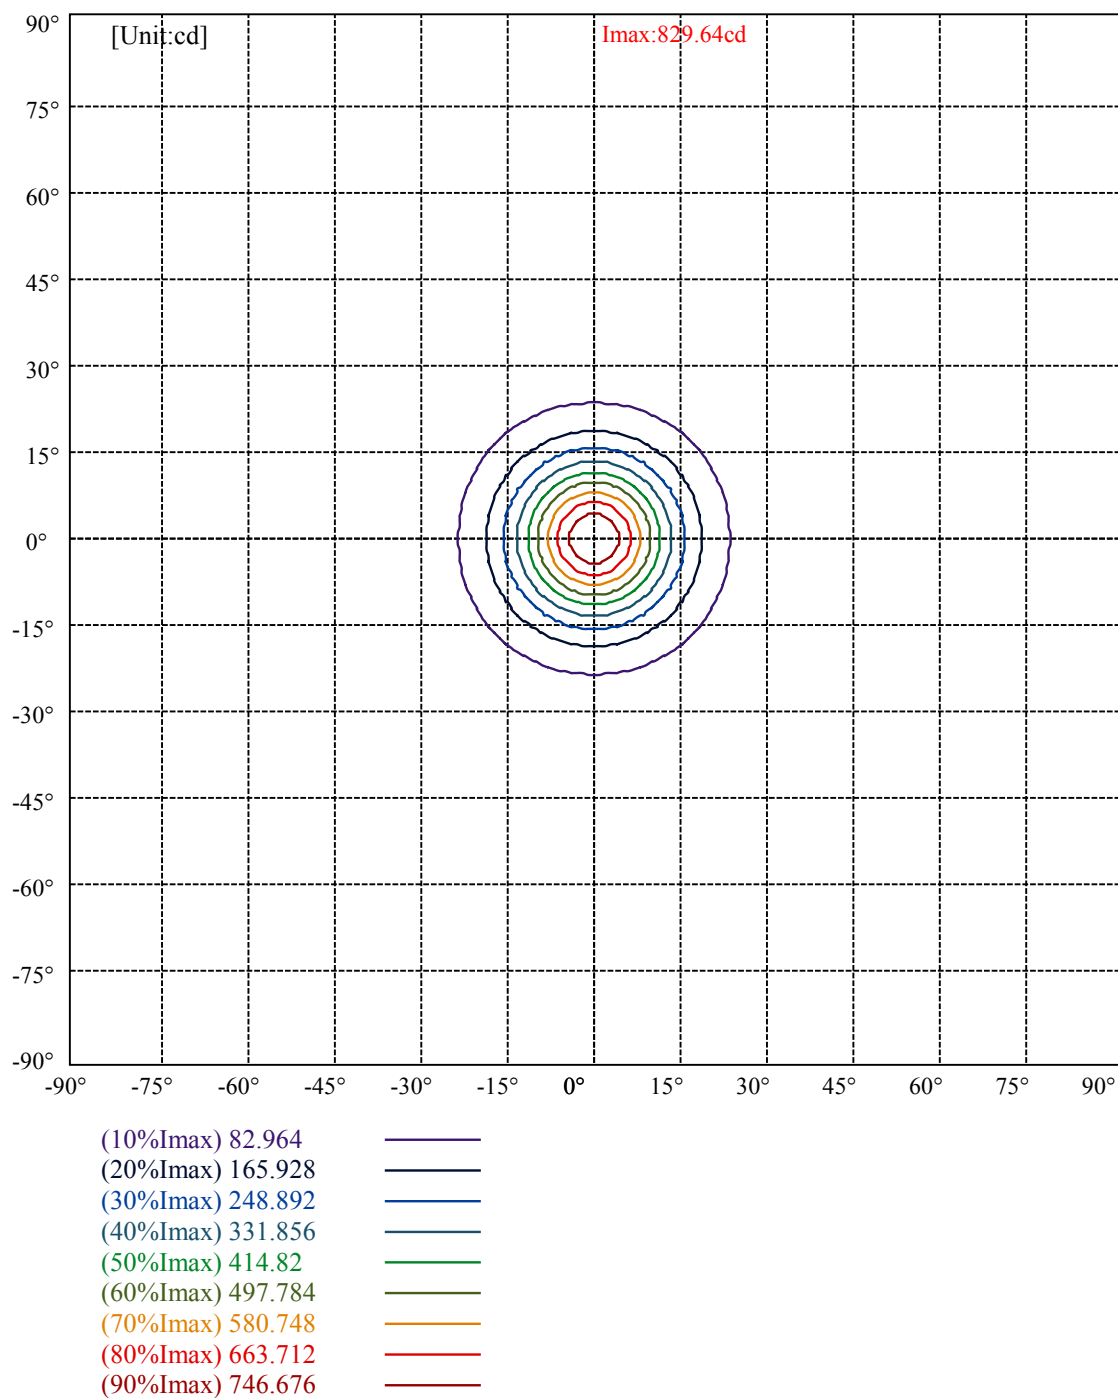

Luminance Table


γ	45	50	55	60	65	70	75	80	85
C0	1652	1169	927	774	915	1131	1495	2185	4353
C45	1652	1169	927	774	915	1131	1495	2185	4353
C90	1652	1169	927	774	915	1131	1495	2185	4353

L(Hor)(65)	L(Ver)(65)	L45(65)	L(Hor)(75)	L(Ver)(75)	L45(75)	L(Hor)(85)	L(Ver)(85)	L45(85)
915	915	915	1495	1495	1495	4353	4353	4353

Glare Table

Glare	Quality	Service Values Illuminance(lx)							
1.15	A	2000	1000	500	≤ 300				
1.5	B		2000	1000	500	≤ 300			
1.85	C			2000	1000	500	≤ 300		
2.2	D				2000	1000	500	≤ 300	
2.55	E					2000	1000	500	≤ 300
		a	b	c	d	e	f	g	h

Luminance Limiting Curve

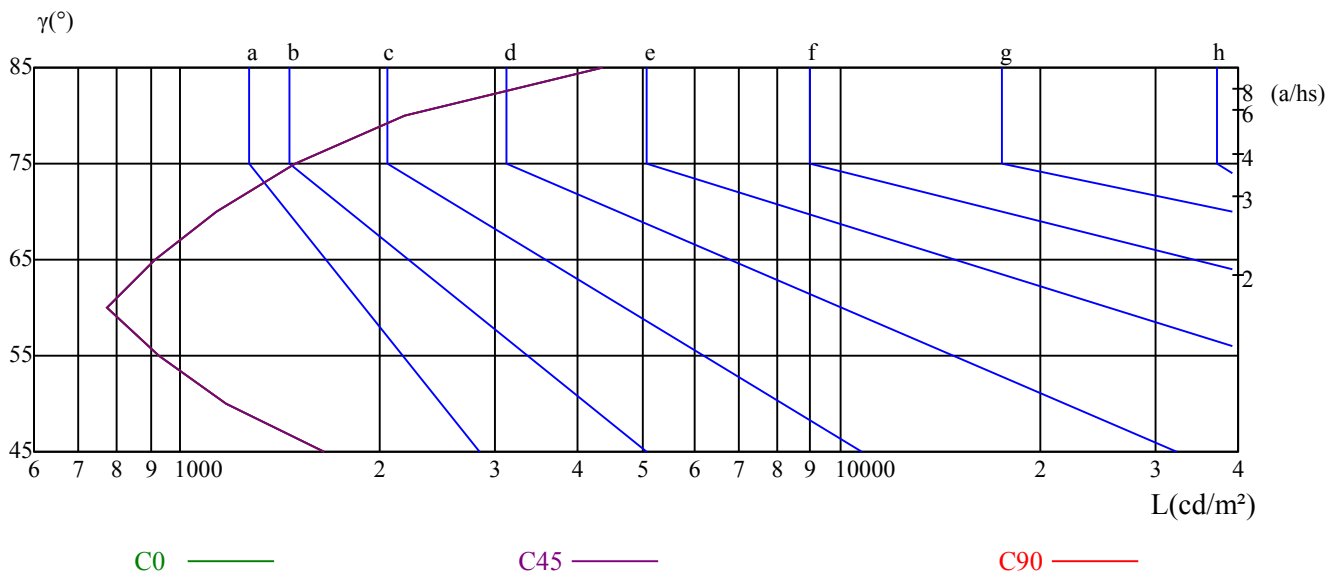

Illumination assessment according UGR											
Rf of Ceiling	70	70	50	50	30	70	70	50	50	30	
Rf of Wall	50	30	50	30	30	50	30	50	30	30	
Rf of Floor	20	20	20	20	20	20	20	20	20	20	
Room dimensions		Viewed crosswise					Viewed endwise				
X	Y										
2H	2H	8.37	9.27	8.78	9.63	10.00	7.26	8.15	7.66	8.51	8.88
	3H	8.50	9.30	8.93	9.68	10.08	7.51	8.31	7.94	8.69	9.09
	4H	8.76	9.49	9.20	9.89	10.32	7.88	8.62	8.32	9.02	9.44
	6H	9.23	9.91	9.69	10.33	10.78	8.59	9.26	9.05	9.68	10.13
	8H	9.60	10.24	10.06	10.67	11.13	9.07	9.71	9.53	10.14	10.60
	12H	10.14	10.75	10.61	11.19	11.66	9.82	10.43	10.29	10.86	11.34
4H	2H	8.15	8.89	8.59	9.29	9.71	7.08	7.81	7.52	8.21	8.63
	3H	8.42	9.04	8.89	9.48	9.95	7.52	8.14	7.99	8.58	9.05
	4H	8.91	9.45	9.39	9.91	10.41	8.17	8.71	8.65	9.17	9.67
	6H	9.63	10.10	10.14	10.59	11.10	9.16	9.63	9.67	10.13	10.63
	8H	10.22	10.66	10.74	11.16	11.68	9.88	10.32	10.41	10.82	11.35
	12H	11.03	11.43	11.56	11.93	12.50	10.91	11.31	11.44	11.81	12.38
8H	4H	9.04	9.48	9.57	9.98	10.50	8.38	8.82	8.91	9.32	9.84
	6H	10.04	10.40	10.59	10.92	11.48	9.68	10.03	10.22	10.55	11.11
	8H	10.92	11.22	11.49	11.78	12.32	10.70	11.00	11.27	11.56	12.11
	12H	12.03	12.25	12.61	12.81	13.38	12.02	12.24	12.60	12.80	13.37
12H	4H	9.10	9.50	9.63	9.99	10.56	8.46	8.86	8.99	9.35	9.92
	6H	10.27	10.57	10.84	11.13	11.67	9.93	10.22	10.50	10.78	11.33
	8H	11.23	11.46	11.81	12.01	12.58	11.04	11.27	11.62	11.82	12.39
Variation with the observer position at spacings:											
S = 1.0H		4.3/-3.7					4.3/-3.7				
S = 1.5H		5.6/-2.7					5.6/-2.7				
S = 2.0H		6.3/-2.2					6.3/-2.2				
Standard tables:		BKBF					BKBF				
Uncorrected UGR		-4.8					-4.8				

依据CIE Publ. 117 计算 UGR, S/H = 0.25