



lumini Solucoes em Iluminacao LTDA
www.lumini.com.br
Email: laboratorio@lumini.com.br
Tel: +55 11 3437-5555 Fax: +55 11 3437-5555
Address: Rua Ferreira Viana, 716 - Socorro - São Paulo/SP

lumini

LumCAT:

Luminaire: solum cob fc

LampCAT: modulo led 8.5W 30K irc 90

Ballast type: led driver 180mA

Report No:

Voltage(V): 127.0000

Test No:

Current(A): 0.0590

Number of Lamps: 1

Power (W): 7.3700

Lamp flux(lm): 750.0

PF: 0.9800

Length(mm): 130

Width(mm): 130

Phm Type: C

Height(mm): 0

Photometric Results

Lumens(lm): 508.55, Efficiency(%): 67.81% , Luminous Efficacy(lm/W): 69.00

Central intensity(cd): 3941.727, Maximum intensity(cd): 3941.727

Angle of maximum intensity: $C=0.0$ $\gamma=0.0$


Beam angle of C0 plane : 17.40


Average BeamAngle(IEC 61341): 17.40

Equipment: equipamento lumini
Temperature(°C): 25.5


Date: 17/09/2024
Humidity(%): 55.0%

Operator: 01
Distance(m): 6.90

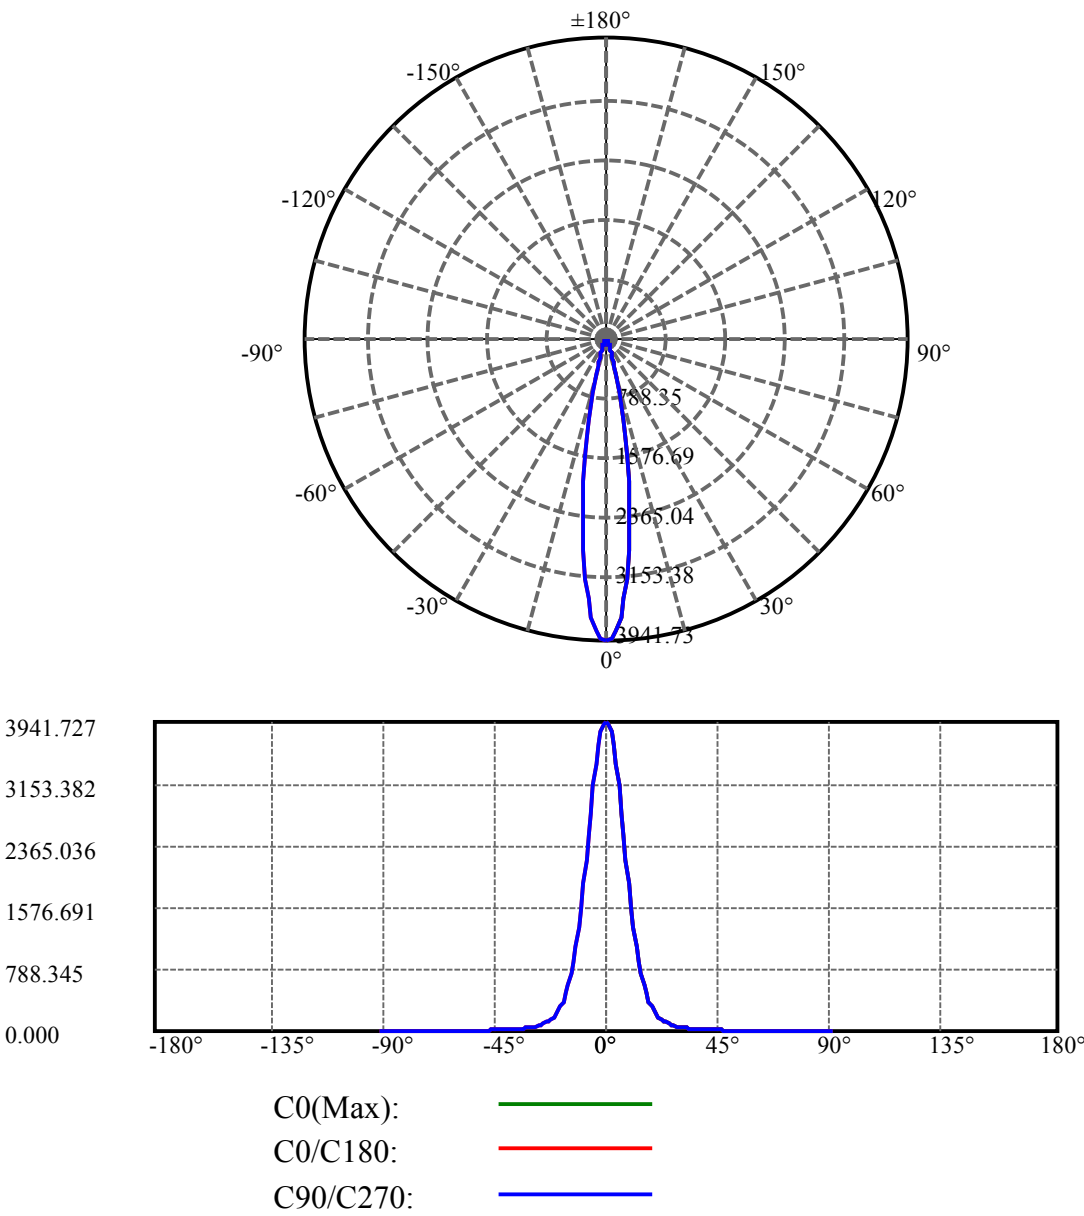

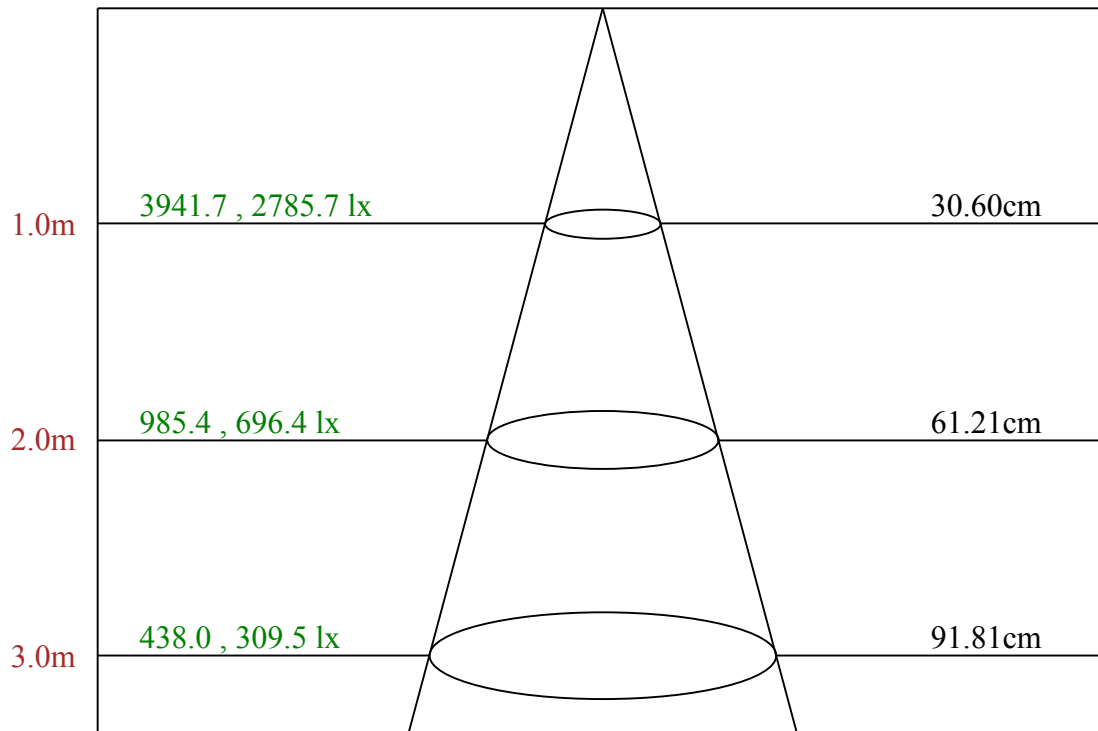

Max , Ave Beam angle of C0 plane 17.40

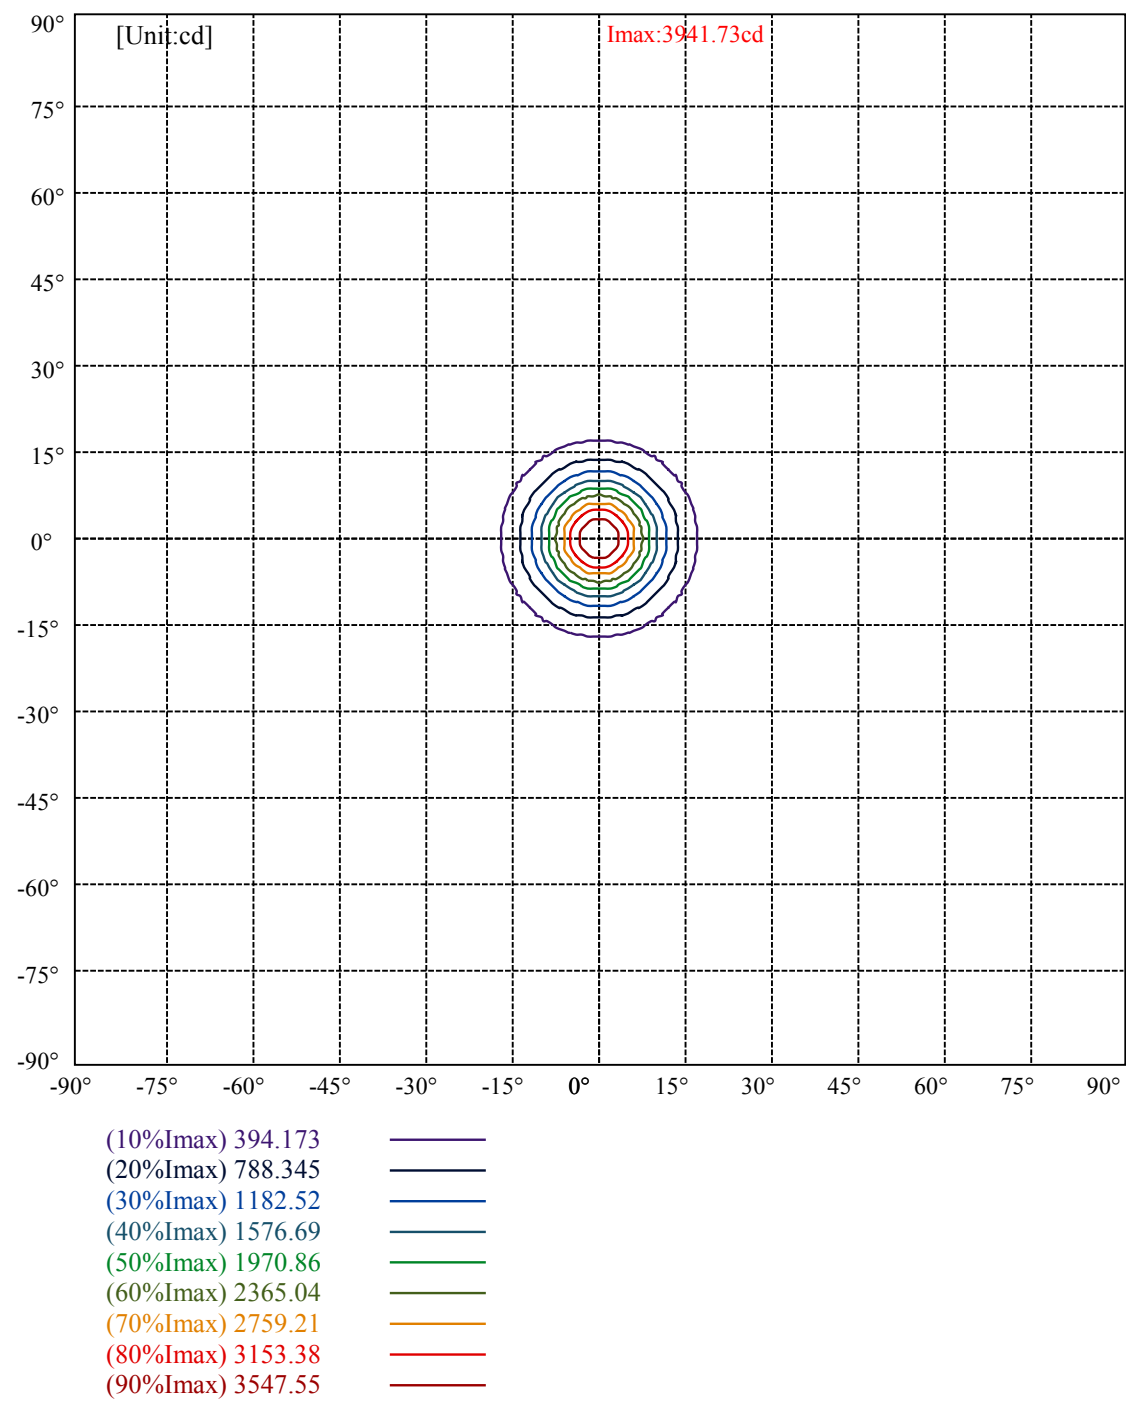

Luminance Table


γ	45	50	55	60	65	70	75	80	85
C0	1131	903	604	355	300	297	359	503	970
C45	1131	903	604	355	300	297	359	503	970
C90	1131	903	604	355	300	297	359	503	970

L(Hor)(65)	L(Ver)(65)	L45(65)	L(Hor)(75)	L(Ver)(75)	L45(75)	L(Hor)(85)	L(Ver)(85)	L45(85)
300	300	300	359	359	359	970	970	970

Glare Table

Glare	Quality	Service Values Illuminance(lx)							
1.15	A	2000	1000	500	≤ 300				
1.5	B		2000	1000	500	≤ 300			
1.85	C			2000	1000	500	≤ 300		
2.2	D				2000	1000	500	≤ 300	
2.55	E					2000	1000	500	≤ 300
		a	b	c	d	e	f	g	h

Luminance Limiting Curve

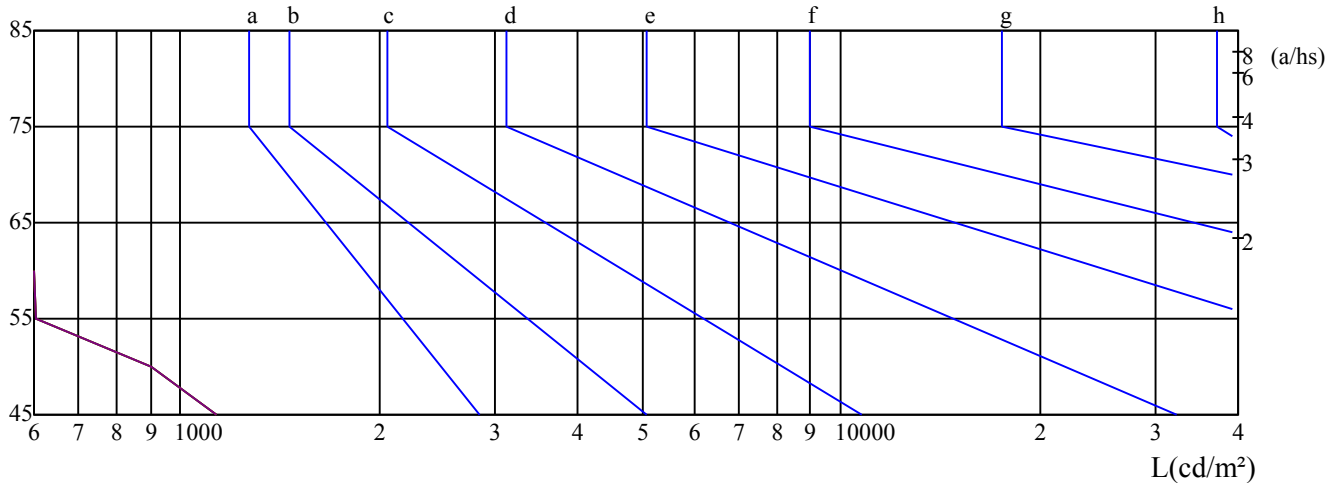 $\gamma(^{\circ})$ 

C0 ———

C45 ———

C90 ———

Illumination assessment according UGR											
Rf of Ceiling	70	70	50	50	30	70	70	50	50	30	
Rf of Wall	50	30	50	30	30	50	30	50	30	30	
Rf of Floor	20	20	20	20	20	20	20	20	20	20	
Room dimensions		Viewed crosswise					Viewed endwise				
X	Y										
2H	2H	3.68	4.62	4.05	4.93	5.25	3.68	4.62	4.05	4.93	5.25
	3H	3.88	4.72	4.27	5.05	5.40	3.88	4.72	4.27	5.05	5.40
	4H	4.10	4.87	4.50	5.22	5.59	4.10	4.87	4.50	5.22	5.59
	6H	4.53	5.24	4.95	5.62	6.02	4.53	5.24	4.95	5.62	6.02
	8H	4.86	5.53	5.28	5.91	6.32	4.86	5.53	5.28	5.91	6.32
	12H	5.32	5.96	5.75	6.35	6.77	5.32	5.96	5.75	6.35	6.77
4H	2H	3.61	4.38	4.01	4.74	5.10	3.61	4.38	4.01	4.74	5.10
	3H	3.92	4.57	4.35	4.97	5.38	3.92	4.57	4.35	4.97	5.38
	4H	4.34	4.89	4.77	5.32	5.77	4.34	4.89	4.77	5.32	5.77
	6H	4.97	5.46	5.44	5.92	6.37	4.97	5.46	5.44	5.92	6.37
	8H	5.48	5.94	5.97	6.40	6.87	5.48	5.94	5.97	6.40	6.87
	12H	6.19	6.61	6.68	7.06	7.58	6.19	6.61	6.68	7.06	7.58
8H	4H	4.43	4.88	4.91	5.34	5.82	4.43	4.88	4.91	5.34	5.82
	6H	5.31	5.69	5.82	6.17	6.68	5.31	5.69	5.82	6.17	6.68
	8H	6.08	6.39	6.61	6.91	7.41	6.08	6.39	6.61	6.91	7.41
	12H	7.05	7.29	7.60	7.81	8.33	7.05	7.29	7.60	7.81	8.33
12H	4H	4.46	4.88	4.95	5.33	5.86	4.46	4.88	4.95	5.33	5.86
	6H	5.49	5.80	6.03	6.33	6.82	5.49	5.80	6.03	6.33	6.82
	8H	6.32	6.56	6.87	7.08	7.60	6.32	6.56	6.87	7.08	7.60
Variation with the observer position at spacings:											
S = 1.0H		1.4/-1.9					1.4/-1.9				
S = 1.5H		2.5/-2.4					2.5/-2.4				
S = 2.0H		3.8/-2.1					3.8/-2.1				
Standard tables:		BK4					BK4				
Uncorrected UGR		-11.9					-11.9				

依据CIE Publ. 117 计算 UGR，S/H = 0.25